





Brass x Galvanized Steel Dielectric Union

Solder x FIP Connection, 250 PSI

DIELECTRIC UNION

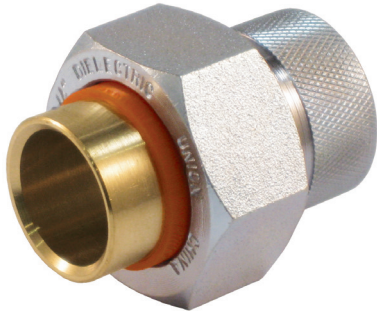

FEATURES

Prevents Accelerated Corrosion
Buna Seats: -20°F to 180°F

CERTIFICATIONS/APPROVALS

ANSI B1.20.1
Solder End ANSI B16.18
ASSE 1079

PRESSURE/TEMPERATURE RATING


250 PSI

MATERIALS

No.	Part	Material
1	Body	Steel - Zinc Plated
2	Tail Piece	Brass
3	Union Nut	Steel - Zinc Plated
4	Dielectric Ring	Nylon 66
5	Gasket*	Buna-N

DIMENSIONS

Part No	Size	A	B	C
Solder x FIP				
701-103	1/2" SWT x 1/2" FIP	1.87	1.61	0.65
701-104	3/4" SWT x 3/4" FIP	2.11	1.83	0.79
701-105	1" SWT x 1" FIP	2.34	2.15	0.86
701-106	1-1/4" SWT x 1-1/4" FIP	2.5	2.59	0.94
701-107	1-1/2" SWT x 1-1/2" FIP	2.79	2.95	1.11
701-108	2" SWT x 2" FIP	3.09	3.75	1.32

 WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.