


Cast Iron Strainer

Y-Strainer, Bolted Bonnet, Stainless Steel Screen, Class 125

F-651

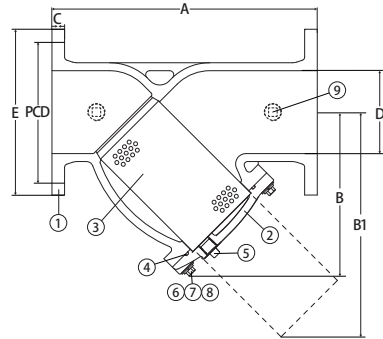

FEATURES

Bolted Bonnet
1/4" NPT Test Plug Upstream and Downstream

CERTIFICATIONS/APPROVALS

Flange: ASME B16.1
Lead Free Compliant

TEMPERATURE RATING

14°F to 248°F

MATERIALS

No.	Part	Material
1	Body	Cast Iron - ASTM A126 B
2	Cover	Cast Iron - ASTM A126 B
3	Screen	Stainless Steel 304 - 20 Mesh
4	Packing	EPDM
5	Drain Plug	Brass - 3/4" NPT
6	Bolt	Carbon Steel Galvanized
7	Spring Washer	Carbon Steel Galvanized
8	Washer	Carbon Steel Galvanized
9	Test Plug	Brass - 1/4" NPT

DIMENSIONS

Part No	Size	Weight	A	B	B1	C	D	E	Bolts	Cv	PCD	Screen Mesh	N-OC
106-625	2-1/2"	22	11.42	5.39	8.1	0.71	2.56	7.28	4	110.9	5.50	0.06 (10)	4-3/4"
106-603	3"	28	12.20	5.98	9.4	0.71	3.15	7.87	4	174.2	6.00	0.06 (10)	4-3/4"
106-604	4"	36	13.78	8.07	12.5	0.71	3.94	8.66	8	253.4	7.50	0.06 (10)	8-3/4"
106-606	6"	73	18.90	10.59	15.0	0.71	5.91	11.22	8	570.3	9.50	0.06 (10)	8-7/8"
106-608	8"	123	23.62	13.43	20	0.75	7.87	13.39	8	863.4	11.75	0.10 (5)	8-7/8"
106-610	10"	291	28.74	17.91	27.56	0.87	10	15.94	12	1711	14.25	0.10 (5)	12-1"
106-612	12"	454	33.46	18.74	28.74	0.96	12	18.11	12	2218	17	0.10 (5)	12-1"