


Carbon Steel Ball Valve

2 Piece, Full Port, Flanged Connection, Stainless Steel Trim, Class 150

FL-CS-100-150



CRN# OC15754.524



FEATURES


- Raised Face Flange
- Wrench Operator
- Locking Device Comes Standard
- Fire Safe Stem and Body Graphite Seals
- Air Tested Seat Leakage: 85 PSI
- Hydraulic Tested Body: 427 PSI
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available

CERTIFICATIONS/APPROVALS

- UL Listed (1/2" - 8")
 - MHKZ - Manual Valves
 - YQNZ - Compressed Gas Shut-Off Valves
 - YRBX - Flammable Liquid Shut-Off Valves
 - YSDT - LP Gas Shut-Off Valves
- CSA Certified
 - ASME B16.33 (125 PSIG) (2")
 - ASME B16.38 (125 PSIG) (3" - 8")
 - CSA 3.16 (125 PSIG) (2" - 8")
- Conforms to ANSI B16.34
- Flange: ANSI B16.5
- Face-to-Face: ANSI B16.10
- API 607 Fire Safe
- Buy American Act Compliant

VALVE SEAT RATING

Class 300: 700 WOG, Class 150: 300 WOG - 150 WSP

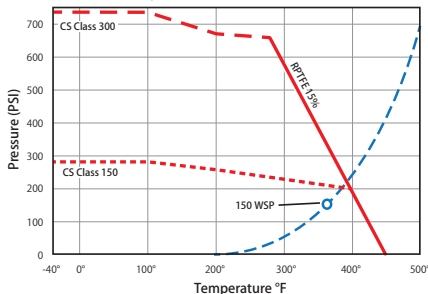

MATERIALS

No.	Part	Material
1	Body	WCB Carbon Steel
2	Body Cap	WCB Carbon Steel
3	Ball	CF8M Stainless Steel
4	Seat (2)*	RPTFE - 15%
5	Stem	304 Stainless Steel
6	Body Seal*	PTFE / Graphite
7	Stem Seal*	PTFE
8	Packing Gland (3)*	PTFE / Graphite
9	Gland Bushing*	PTFE
10	Gland Flange	CF8 Stainless Steel
11	Stop Plate	304 Stainless Steel
12	Handle	WCB Carbon Steel
13	Snap Ring	SUS420 Stainless Steel
14	Body Bolt (4 or 6)	A193-B7 Steel
15	Gland Bolt (2)*	304 Stainless Steel
16	Handle Washer	304 Stainless Steel
17	Handle Bolt	304 Stainless Steel
18	Static Device (2)	304 Stainless Steel
19	Spring (2)*	304 Stainless Steel
20	Body Nut (4 or 6)**	A194-2H Steel
21	Tag	304 Stainless Steel
22	Set Screw	304 Stainless Steel

* Not shown in drawing, ** Component only on +5" valves, *Included in repair kit

DIMENSIONS

Part No	Size	A	B	C	D	E	F	G	H	I	J	Bolts	Torque	Cv	ISO5211
600-203	1/2"	0.63	1.38	2.38	3.50	0.06	0.31	0.63	4.25	3.10	5.31	4	48	42	F05
600-204	3/4"	0.79	1.69	2.76	3.86	0.06	0.35	0.63	4.61	3.28	5.31	4	90	68	F05
600-205	1"	0.98	2.01	3.13	4.25	0.06	0.38	0.63	5.00	3.74	6.30	4	148	109	F07
600-207	1-1/2"	1.50	2.87	3.88	5.00	0.06	0.50	0.63	6.50	4.79	9.06	4	270	268	F07
600-208	2"	1.97	3.62	4.74	5.98	0.06	0.56	0.75	7.01	5.11	9.06	4	395	486	F07
600-209	2-1/2"	2.56	4.13	5.49	7.01	0.06	0.63	0.75	7.48	5.54	9.06	4	609	843	F07
600-210	3"	3.15	5.00	6.00	7.48	0.06	0.69	0.75	7.99	5.86	13.78	4	913	1277	F10
600-211	4"	3.94	6.18	7.50	9.02	0.06	0.88	0.75	9.02	6.91	15.75	8	1443	2055	F10
600-212	6"	5.98	8.50	9.51	10.98	0.06	0.94	0.87	15.51	10.57	31.50	8	4870	5040	F12
600-213*	8"	7.99	10.63	11.75	13.50	0.06	1.06	0.87	17.99	13.39	43.31	8	8522	9314	F14
600-214*	10"	9.84	12.76	14.25	15.98	0.06	1.13	0.98	20.98	16.38	57.09	12		14590	F16
600-215*	12"	11.81	15.00	17.01	19.02	0.06	1.19	0.98	24.02			12		21839	F16

*8-12" Special Order



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.