


Galvanized Steel Dielectric Union

FIP x FIP Connection, 250 PSI

DIELECTRIC UNION

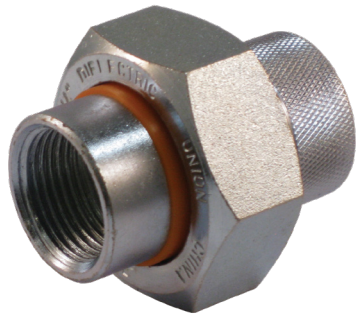

FEATURES


Prevents Accelerated Corrosion
 Buna Seats: -20°F to 180°F

CERTIFICATIONS/APPROVALS

ANSI B1.20.1
 ASSE 1079

PRESSURE/TEMPERATURE RATING

250 PSI



MATERIALS

No.	Part	Material
1	Body	Steel - Zinc Plated
2	Tail Piece	Steel - Zinc Plated
3	Union Nut	Steel - Zinc Plated
4	Dielectric Ring	Nylon 66
5	Gasket*	Buna-N

DIMENSIONS

Part No	Size	A	B
701-413	1/2" FIP x 1/2" FIP	2.14	1.61
701-414	3/4" FIP x 3/4" FIP	2.21	1.83
701-415	1" FIP x 1" FIP	2.54	2.58
701-416	1-1/4" FIP x 1-1/4" FIP	2.73	2.96
701-417	1-1/2" FIP x 1-1/2" FIP	2.73	3.75
701-418	2" FIP x 2" FIP	3.12	4.3