

Gas Ball Valve 2 Piece • Flare Connection • 600 WOG



CRN# 0C16887.5469870YTN

T-204 FL x FL


Features


- T-Handle and Teardrop Handle Available on Most Configurations
- Valve Can be Locked in Closed Position by Reversing Handle
- 2 NBR O-Rings
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem Lifetime Warranty
 Use Model T-100NE for Sizes Above 3/4"

Approvals LISTED IN STEEL

- UL Listed
 - YQNZ Compressed Gas Shut-Off Valves
 - YRPV Gas Shut-Off Valves
 - YSDT LP Gas Shut-Off Valves
 - MHKZ Manual Valves
 - YRBX Flammable Liquid Shut-Off Valves
 - SFJQ Valves, Refrigerant
- CSA Certified
 - ANSI Z21.15 (.5 PSIG)
 - ASME B16.44 (5 PSI)
 - CSA 9.4:21 (5 PSIG) indoor/outdoor uses
- ANSI B1.20.1
- MSS SP-110
- Flare Connection in accordance with NFPA 54/ANSI Z223.1
- Buy American Act Compliant

Valve Seat Rating



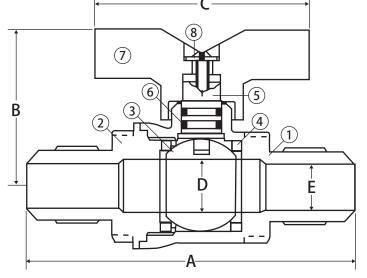

Material Specifications

No.	Part	Materials
1	Body	Brass - C37700
2	End Connection	Brass - C37700
3	Ball	Chrome Plated Brass - C38500
4	Seat (2)	PTFE
5	Stem	Brass - C38500
6	Stem O-ring (2)	NBR
7	Handle	Aluminum
8	Handle Screw	Steel - Geomet® Plated

Dimensions

Part No.	Size	Α	В	C	D	E		
T-handle								
101-601	1/2" FL x 3/8" FL	2.98	1.63	2.32	0.47	0.40		
101-602	3/8" FL x 3/8" FL	2.81	1.63	2.32	0.47	0.28		
101-603	1/2" FL x 1/2" FL	3.14	1.63	2.32	0.47	0.40		
101-604	5/8" FL x 5/8" FL	3.45	1.69	2.32	0.59	0.50		

Teardrop Handle										
101-612	3/8" FL x 3/8" FL	2.81	1.40	1.97	0.47	0.28				
101-613	1/2" FL x 1/2" FL	3.14	1.40	1.97	0.47	0.40				
101-614	5/8" FL x 5/8" FL	3.45	1.46	1.97	0.59	0.50				



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

