

Gas Ball Valve

2 Piece • Threaded Connection • 400 WOG




Teardrop Handle



Red T-Handle

CRN# 0C16887.5469870YTN

T-205

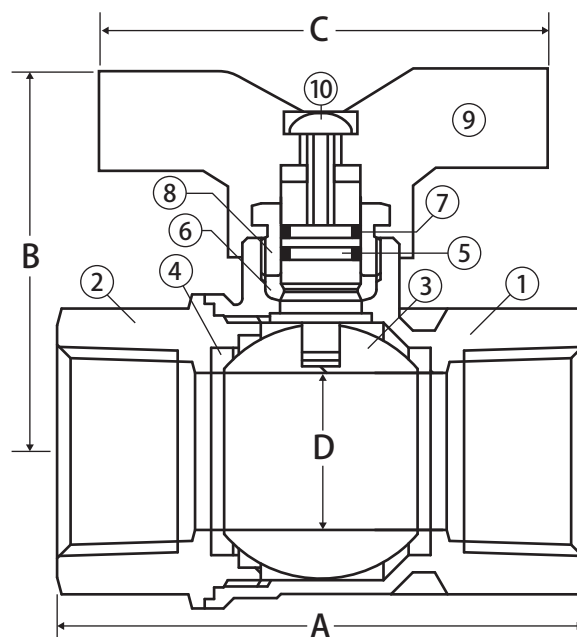

Features


- Valve Can be Locked in Closed Position by Reversing Handle
- Triple Sealing Stem with 2 FKM O-Rings and Teflon® Seal
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty

Approvals

- CSA Certified
 - ANSI Z21.15 (.5 PSIG)
 - CGA 3.16 (125 PSIG)
- ANSI B1.20
- MSS SP-110
- Buy American Act Compliant

Valve Seat Rating

400 WOG

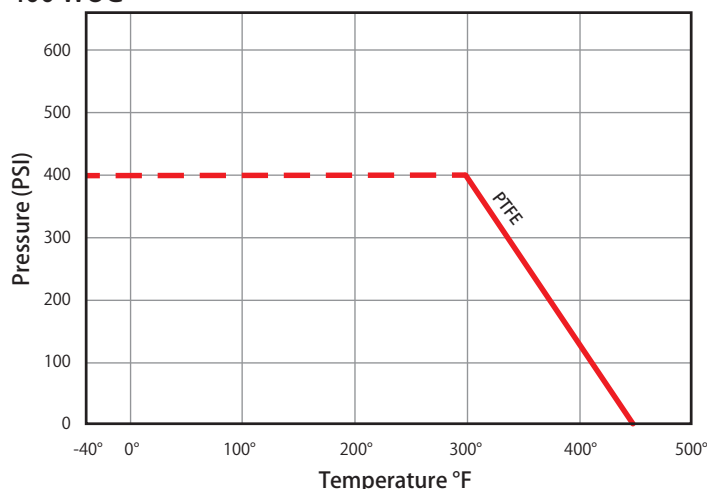

Material Specifications

| No. | Part | Materials |
|-----|-----------------|------------------------------|
| 1 | Body | Brass - C37700 |
| 2 | End Connection | Brass - C37700 |
| 3 | Ball | Chrome Plated Brass - C37700 |
| 4 | Seat (2) | PTFE |
| 5 | Stem | Brass - C38500 |
| 6 | Packing | PTFE |
| 7 | Stem O-ring (2) | FKM |
| 8 | Packing Gland | Brass - C38500 |
| 9 | Handle | Aluminum |
| 10 | Handle Screw | Steel - Geomet® Plated |

Dimensions

| Part No. | Size | A | B | C | D |
|------------------------|----------|------|------|------|------|
| Yellow Teardrop Handle | | | | | |
| 102-513 | 1/2" FIP | 2.23 | 1.50 | 2.32 | 0.39 |
| 102-514 | 3/4" FIP | 2.46 | 1.54 | 2.32 | 0.59 |
| Red T-handle | | | | | |
| 102-503 | 1/2" FIP | 2.23 | 1.73 | 2.32 | 0.39 |
| 102-504 | 3/4" FIP | 2.46 | 1.77 | 2.32 | 0.59 |
| 102-505 | 1" FIP | 3.08 | 2.21 | 2.32 | 0.79 |



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

