Lead Free Brass Ball Valve

2 Piece, Crimp Pex Connection, 400 CWP

T-412G

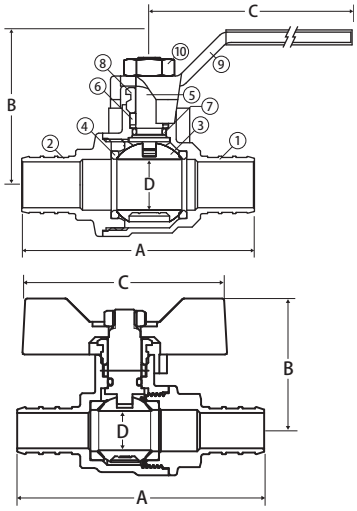

FEATURES

Dezincification Resistant Brass Alloy
Gland Follower and Single O-Ring Stem Design
Blow-Out Proof Stem
100% Leak Tested
IAPMO Certified - NSF 61, NSF 372 & NSF 14 Certified
ASTM F1807
Wetted Surfaces Contain Less than .25% Content

CERTIFICATIONS/APPROVALS

ASTM F1807
IAPMO Certified
- *NSF 61-8*
- *NSF 372*
- *Uniform Plumbing Code (cUPC)*
  - *IAPMO/ANSI Z1157-2014*
  - *NSF/ANSI 14-2014*

PRESSURE/TEMPERATURE RATING

Body rated to 400 CWP
Crimp connection rated to 100 CWP up to 180˚F

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	End Connection	Lead Free Brass - C46500
3	Ball	Chrome Plated Lead Free Brass - C46500
4	Seat (2)	PTFE
5	Stem	Lead Free Brass - C46500
6	Packing	PTFE
7	Stem O-ring	EPDM
8	Packing Gland	Lead Free Brass - C37700
9	Handle	Steel
10	Handle Nut	SS304 Stainless Steel

DIMENSIONS

Part No	Size	A	B	C	D
Lever Handle					
103-523PG	1/2"	2.47	1.5	3.41	0.47
103-524PG	3/4"	2.72	1.57	3.36	0.67
103-525PG	1"	3.27	1.57	3.15	0.86
103-526PG	1-1/4"	3.62	2.16	4.29	0.86
103-527PG	1-1/2"	4.29	2.38	4.29	1.04
103-528PG	2"	5.57	2.64	4.29	1.37
T-Handle					
103-523PG-TH	1/2"	2.47	1.32	2.05	0.47
103-524PG-TH	3/4"	2.72	1.76	2.68	0.67
103-525PG-TH	1"	3.27	1.78	2.68	0.86

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

© 2024 JOMAR VALVE
I P: 586.268.1220 I F: 586.979.8615 I JOMARVALVE.COM