


# Lead Free Brass Ball Valve

## 2 Piece, Press x Crimp Pex Connection, 250 CWP

### T-412G PRESS x CRIMP

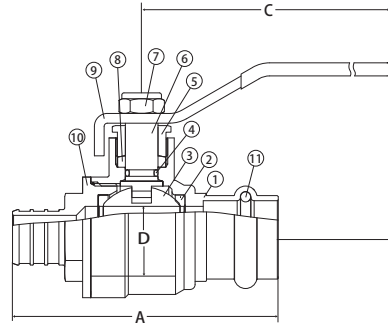

#### FEATURES

Dezincification Resistant Brass Alloy  
 Gland Follower and Single O-Ring Stem Design  
 Blow-Out Proof Stem  
 100% Leak Tested  
 IAPMO Certified - NSF 61 & NSF 372 Certified  
 ASTM F1807  
 Wetted Surfaces Contain Less than .25% Content

#### CERTIFICATIONS/APPROVALS

ASTM F1807  
 Conforms to IAPMO PS 117  
 - NSF 61-8  
 - NSF 372  
 - Uniform Plumbing Code (cUPC)  
 • IAPMO/ANSI Z1157-2014  
 • NSF/ANSI 14-2014

#### PRESSURE/TEMPERATURE RATING

Body rated to 250 CWP  
 Crimp Connection Rated to 100 CWP up to 180°F

#### MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	Seat	PTFE
3	Ball	304 Stainless Steel
4	O-Ring	NBR
5	Packing Nut	Brass - C37700
6	Stem	Brass - C37700
7	Handle Nut	Steel - Chrome Plated
8	Packing	PTFE
9	Handle	Steel
10	End Connection	Lead Free Brass - C46500
11	O-Ring	EPDM

#### DIMENSIONS

Part No	Size	A	B	C	D
103-563PG	1/2"	2.89	1.81	3.46	0.47
103-564PG	3/4"	3.21	2.09	4.29	0.67
103-565PG	1"	3.7	2.25	4.29	0.86