

Lead Free Brass Boiler Drain

Threaded x FIP Connection, 125 WOG



T-622G

Features


- Alloy Dezincification Resistant Brass
- Wetted Surfaces Contain Less than .25% Lead Content

Approvals

- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Uniform Plumbing Code (cUPC)

Pressure Rating

- 125 WOG

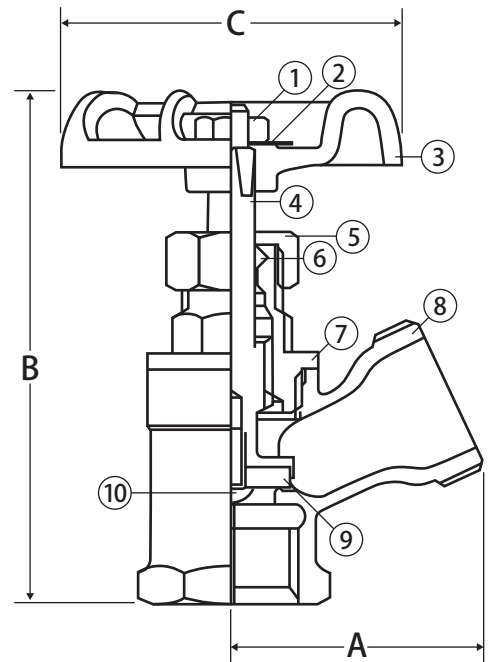

Material Specifications

No.	Part	Materials
1	Handle Nut	Steel
2	Name Plate	Aluminum
3	Hand Wheel	Cast Iron
4	Stem	Lead Free Brass
5	Packing Nut	Lead Free Brass
6	Gland Packing	Buna-N
7	Bonnet	Lead Free Cast Brass
8	Body	Lead Free Cast Brass
9	Seat Packing	Buna-N
10	Seat Screw	Lead Free Brass

Dimensions

Part No.	Size	A	B	C
201-103G	1/2"	1.58	3.31	2.13
201-104G	3/4"	1.58	3.35	2.13