


Stainless Steel Ball Valve

3 Piece 4 Bolt, Swing Out Body, Full Port, Threaded x Square Flange Connection,
Stainless Steel Trim, 1000 WOG

T-SS-1000N-4B NPT X SQUARE FLANGE

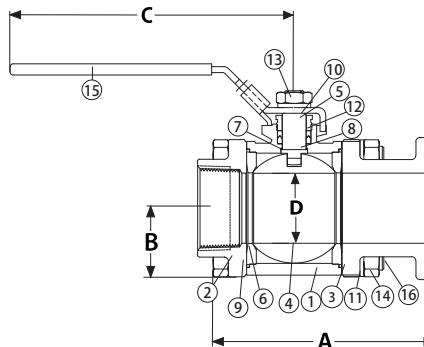

FEATURES


Type B Flange Face
Latch Lock may be Locked in Open or Closed Positions
29 in-Hg Vacuum Rating
100% Leak Tested
Wetted Surfaces Contain Less Than .25% Lead Content
Mating Flanges Available
Repair Kits Available

CERTIFICATIONS/APPROVALS

UL Listed
 - MHKZ - Manual valves
 - YQNZ - Compressed gas shut-off valves
 - YRBX - Flammable liquid shut-off valves
 - YRPV - Gas shut-off valves
 - YSDT - LP gas shut-off valves
 - YQAR - Anhydrous ammonia shut-off valves
 MSS SP-110
 NACE Certified
 ANSI B16.11
 ANSI B1.20.1
 Conforms to API 598
 Buy American Act Compliant

VALVE SEAT RATING

1000 WOG - 150 WSP

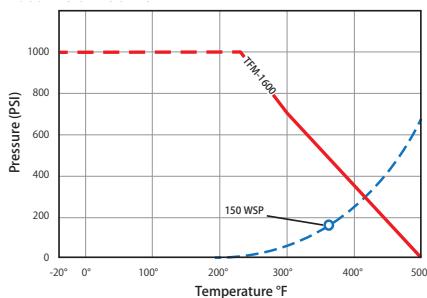

MATERIALS

No.	Part	Material
1	Body	CF8M Stainless Steel
2	End Cap	CF8M Stainless Steel
3	End Cap	CF8M Stainless Steel
4	Ball	CF8M Stainless Steel
5	Stem	316 Stainless Steel
6	Seat (2)*	Hostaflon® TFM 1600
7	Stem Seal *	Hostaflon® TFM 1600
8	Packing (2)*	RPTFE
9	Body Seal	Hostaflon® TFM 1600
10	Lock Washer	304 Stainless Steel
11	Body Lock Washer (4)	304 Stainless Steel
12	Packing Gland	316 Stainless Steel
13	Handle Nut	304 Stainless Steel
14	Body Nut (4)	304 Stainless Steel
15	Handle	304 Stainless Steel
16	Body Bolt (4)	304 Stainless Steel

*Included in repair kit

DIMENSIONS

Part No	Size	A	B	C	D	Torque
500-358	2"	6.65	4.25	7.99	1.97	480

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.