


Balancing

Quarter-Turn, Fixed Orifice, Threaded or Solder Connection, Union End, Integrated Ball Valve, Memory Stop, PT Ports, 600 WOG

TERMINATOR B





FEATURES

+\- 2% Accuracy
Positive Shut-Off
Triple Sealing Stem with 2 Viton® O-Rings and Teflon Seal
Blow-Out Proof Stem
Patented Removable Venturi
Two Pressure Test Ports
Additional Accessory Upon Request
100% Leak Tested
100% Made in Italy
Leakproof Stem - Lifetime Warranty

PRESSURE/TEMPERATURE RATING

600 WOG 325°F Max

MATERIALS

Part	Material
Body	Brass - CW617N
End Connection	Brass - CW617N
Ball	Chrome Plated Brass - CW617N
Seat (2)	Virgin PTFE
Stem	Brass - CW614N
Packing	Virgin PTFE
Stem O-Ring (2)	Viton®
Packing Gland	Brass - CW614N
Handle	Steel - Geomet® Plated
Handle Nut	Steel - Geomet® Plated
Metering Plate	Aluminum
Memory Stop	Brass - CW617N
Memory Stop Screw	Steel - Geomet® Plated
Union O-Ring	Viton®
Tail Piece	Brass - CW617N
Union Nut	Brass - CW617N
Venturi	Brass - CW617N
Ventiru O-Ring	Viton®

DIMENSIONS

Size	Α	В	С	D
1/2"	4.56	1.57	2.95	0.59
3/4"	4.88	1.57	2.95	0.59
1"	5.65	1.93	3.74	0.79
1-1/4"	7.00	2.44	4.72	0.98
1-1/2"	7.81	2.64	4.72	1.26
2"	9.19	3.29	5.91	1.58

 $^{^*}$ Length is for SWT x MNPT Valve, additional dimensions are available upon request





WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Pressure Drop Chart

Terminator B (1/2" - 1")



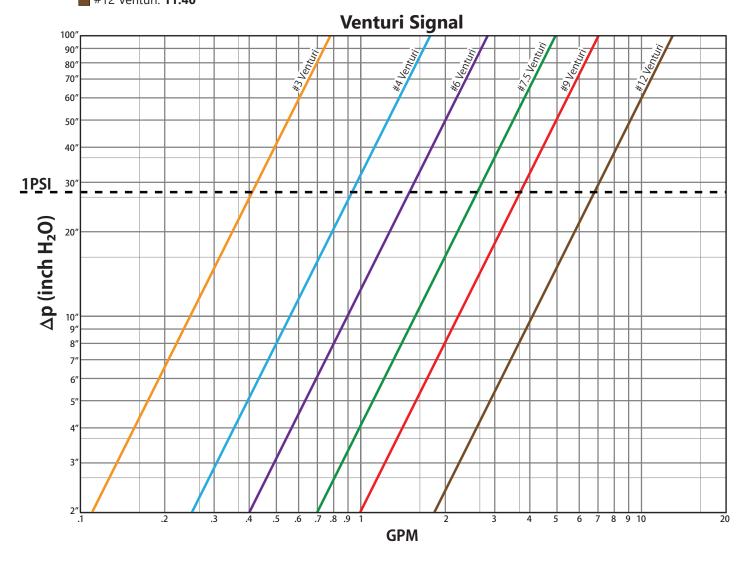



Pressure Drop Chart

Terminator B (1-1/4" - 2")

CV of Valves

1-1/4" w/ #13 Venturi: 15.0
1-1/4" w/ #19 Venturi: 34.0
1-1/2" w/ #15 Venturi: 20.9
1-1/2" w/ #22 Venturi: 57.0
2" w/ #18 Venturi: 30.8
2" w/ #25 Venturi: 57.0
2" w/ #32 Venturi: 88.0

