



10 SERIES

- 1-1/2" and 2" clamp, fillable dry or liquid-filled gauge
- Ranges from -30 inHg to 0 psig through 0 psig to 600 psig
- 2-1/2" and 4" gauge sizes
- Electropolished Stainless Steel case
- 316 Stainless Steel wetted parts
- Meets the requirements of 3-A
- C.I.P, S.I.P and Autoclave (only dry gauges are recommended for Autoclave)

APPLICATIONS

- Food&beverageprocessing
- Pasteurization systems
- Pharmaceutical
- Medical

SPECIFICATIONS

Pressure ranges	-30 inHg to 0 psig through 0 to 600 psig
Accuracy	2-1/2" gauge $\pm 1.6\%$ full scale 4" gauge $\pm 1.0\%$ full scale
Temperature ranges	Media -40 °F to 300 °F (-40 °C to 150 °C) Ambient 25 °F to 140 °F (-4 °C to 60 °C) Storage 25 °F to 140 °F (-4 °C to 60 °C)
Measuring element	316 Stainless Steel "C" tube
Connection	1-1/2" or 2" ASME-BPE Sanitary Clamp, 316L Stainless Steel Diaphragm 316L Stainless Steel, electropolished to 32 μ m Ra or better
Case	Electropolished 304 Stainless Steel
Bayonet ring	Electropolished 304 Stainless Steel
Lens	Safety glass
Pointer	Balanced Aluminum, black finish
Dial	Aluminum, white background, black print
Movement	Stainless Steel
Fill liquid	Glycerin, USP Grade

*Note: Autoclave requires the addition of optional laminated safety glass lens

Diaphragm seal must be installed facing downward or in a vertical position for drainability. Do not install diaphragm seal facing in an upward position.

ORDERING INFORMATION					
SERIES	100	10 Series heavy-duty, bottom connected	101	10 Series heavy-duty, back connected	
CLAMP SIZES	12	1-1/2"	16	2"	
FILL LIQUID	1	Glycerin	Other food grade quality fill fluids available – please consult factory		
GAUGE SIZES	25	2-1/2"	40	4"	
PRESSURE RANGES	01	-30 inHg to 0 psig *	16	-30 inHg to 160 psig	
	04	-30 inHg to 15 psig	19	-30 inHg to 200 psig	
	07	-30 inHg to 30 psig	22	-30 inHg to 300 psig	
	10	-30 inHg to 60 psig	40	0 psig to 15 psig *	
	13	-30 inHg to 100 psig	43	0 psig to 30 psig	
GAUGE FILLS	0	None	1	Glycerin	
		(All food grade quality fill fluids)		2	Silicone
				3	Mineral oil
GAUGE OPTIONS	0	None	1	Max. Indicating Pointer**	
				2	Adjustable Pointer **

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Not available on 4" gauge and 1-1/2" ASME-BPE Sanitary Clamp
 ** Not available on 2-1/2" gauge

EXAMPLE

100 - 12 - 1 - 25 - 55 - 1

Series 10 Series heavy-duty

Clamp size 1-1/2" ASME-BPE Sanitary


Fill liquid Glycerin (USP food grade)

Gauge size 2-1/2"

Pressure range 0 psig to 160 psig

Gauge fill Glycerin

4" Gauge with 2" ASME-BPE Sanitary Clamp Connection 4" Gauge with 1-1/2" ASME-BPE Sanitary Clamp Connection

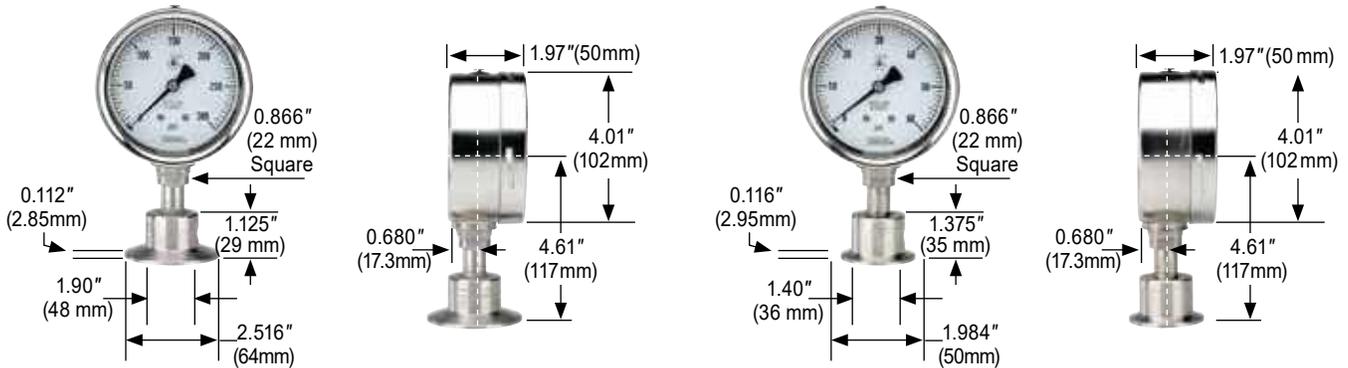

2-1/2" Gauge with 2" ASME-BPE Sanitary Clamp Connection 2-1/2" Gauge with 1-1/2" ASME-BPE Sanitary Clamp Connection

