



## 25 SERIES

- Ranges from -160 inH<sub>2</sub>O vac to 1,160 psig
- Hart® protocol output available
- 316 Stainless Steel wetted parts
- Strong flush diaphragm with minimal fill volume
- Can be cleaned-in-place (CIP) or steamed-in-place (SIP)
- Meets the requirements of 3-A



### APPLICATIONS

- Food & dairy
- Chemical processing
- Pharmaceutical

### FEATURES & BENEFITS

- All Stainless Steel housing
- Easy programming and range adjustment without test pressure via on-board display
- Accuracy 0.2% of adjusted span
- 4:1 turn down
- Active temperature compensation
- Hart® protocol optional

### SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, 4 mA to 20 mA 2-wire and Hart® signal
Pressure ranges	-160 inH <sub>2</sub> O vac to 1,160 psig
Accuracy	0.2% of adjusted span
Stability	<0.1%/year
Adjustment	By 3 push buttons on display or optional Hart® signal
Response time	<100 ms
Service life	>10 years
Temperature ranges	-4 °F to 212 °F (-20 °C to 100 °C); 293 °F (145 °C) for 45 min.
Power requirement*	12 Vdc to 36 Vdc
Measuring element	316 Stainless Steel (Hastelloy C or Tantalum optional)
Connection	316 Stainless Steel
Housing material	304 Stainless Steel (316 Stainless Steel optional)
Environmental rating	IP66 (IP68 optional)
Electrical protection	IP66 (NEMA 4X), IP68 (NEMA 6) optional
Weight	Approximately 2.20 lb. (Depending on process connection)

\* Unregulated



**WARNING:** This product can expose you to chemicals including Lead and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

ORDERING INFORMATION			
SERIES	254		
TRI-CLAMP SIZE	12 1-1/2"	24 3"	
	16 2"		
PRESSURE RANGES (Adjustable)	<b>40inH<sub>2</sub>O-vac</b> -40 inH <sub>2</sub> O to 0 inH <sub>2</sub> O* <b>160inH<sub>2</sub>O-vac</b> -160inH <sub>2</sub> O to 0 inH <sub>2</sub> O <b>14.7/43-vac</b> -14.7 psig to 43 psig <b>14.7/130-vac</b> -14.7 psig to 130 psig <b>14.7/335-vac</b> -14.7 to 335 psig <b>14.7/1145-vac</b> -14.7 psig to 1,145 psig <b>16/40 inH<sub>2</sub>O</b> 0 inH <sub>2</sub> O to 16 inH <sub>2</sub> O to 0 inH <sub>2</sub> O to 40 inH <sub>2</sub> O (.6 psig to 1.45 psig) <b>40/160 inH<sub>2</sub>O</b> 0 inH <sub>2</sub> O to 40 inH <sub>2</sub> O to 0 inH <sub>2</sub> O to 160 inH <sub>2</sub> O (1.45 psig to 5.8 psig) <b>160/637 inH<sub>2</sub>O</b> 0 inH <sub>2</sub> O to 160 inH <sub>2</sub> O to 0 inH <sub>2</sub> O to 637 inH <sub>2</sub> O (5.8 psig to 23 psig) <b>14.5/58</b> 14.5 psig to 58 psig (0 inH <sub>2</sub> O to 400 inH <sub>2</sub> O to 0 inH <sub>2</sub> O to 1,607 inH <sub>2</sub> O) <b>29/145</b> 29 psig to 145 psig (0 inH <sub>2</sub> O to 803 inH <sub>2</sub> O to 0 inH <sub>2</sub> O to 4,017 inH <sub>2</sub> O) <b>87/350</b> 87 psig to 350 psig (0 inH <sub>2</sub> O to 2,410 inH <sub>2</sub> O to 0 inH <sub>2</sub> O to 9,697 inH <sub>2</sub> O) <b>290/1160</b> 290 psig to 1,160 psig (0 inH <sub>2</sub> O to 8,035 inH <sub>2</sub> O to 0 inH <sub>2</sub> O to 32,140 inH <sub>2</sub> O)		
ACCURACIES	1 0.2% of adjusted span		
OUTPUT SIGNALS	1 4 mA to 20 mA, 2-wire	43 4 mA to 20 mA, 2-wire and Hart® signal	
ELECTRICAL CONNECTIONS	25 M12 x 1 (4-pin)	71 PG9 Cable Gland	
28 1/2" NPT Female			
OPTIONS	TC Transparent Cover (for display)		


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

\* Not available in 1-1/2" Tri-Clamp

### EXAMPLE


Series ..... 254 Series  
 Tri Clamp size ..... 1-1/2"  
 Pressure range ..... 0 inH<sub>2</sub>O to 16 inH<sub>2</sub>O to 0 inH<sub>2</sub>O to 40 inH<sub>2</sub>O  
 Accuracy ..... 0.2% of span  
 Output signal ..... 4 mA to 20 mA, 2-wire and Hart® signal  
 Electrical connection ..... M12 x 1 (4-pin)  
 Option ..... Transparent Cover

254 - 12 - 16/40 inH<sub>2</sub>O - 1 - 43 - 25 - TC

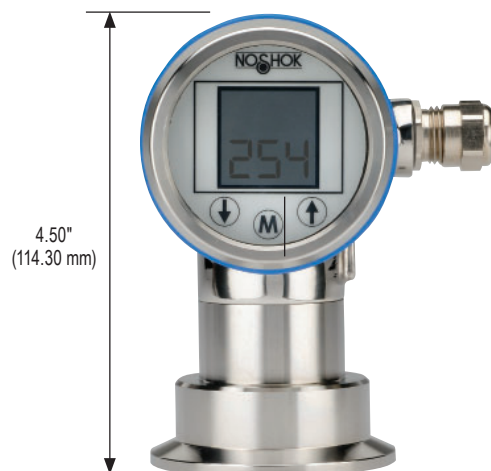

### M12 x 1 (4-PIN) WIRING

1	Brown	V+
2	White	V-
3	Blue	Not used
4	Black	Not used



\*1-1/2", 2" and 3" Tri-Clamp connections available