

Job Name :

Contractor :

Job Location :

Approval :

Engineer :

Contractor's P.O. :

Approval :

Representative :



Arrangement T1

3-Way Butterfly T Assemblies with Linkage and Actuation
Controlling Flow within a 125# Cast Iron Tee

Features:

- Two N501S Series lug style butterfly valves with EPDM liner and stainless steel disc
- 125# cast iron Tee
- Optional butterfly liners, Buna-N (541S) or Viton (531S)
- Custom designed linkage
- Fully assembled and tested
- Six separate arrangement options

Specifications



The MEN501S, DAN501S and SRN501S Series 3-Way Butterfly T assemblies consist of Bonomi N501S Lug pattern rubber lined butterfly valves along with Valbia pneumatic or electric actuators, and linkage assemblies.

Butterfly Valve: The body shall be made from ductile iron, the stem design shall have an ISO pad and square stem, the rubber liner shall be EPDM, and the disc shall be made from CF8M stainless steel. The valve will also be epoxy coated, lug style, ANSI 150 class to 250 Psi, and NSF 61/372 Certified.

Actuators: The pneumatic actuator shall be manufactured by Valbia, with integral side limit stops that do not penetrate the cylinder bore. The spring return models shall incorporate nested style springs for longevity purposes.

The electric actuators shall be manufactured by Valbia, with dual voltages, two extra limit switches, a heater and thermostat, torque limiter, NEMA 4 rating, and a 75% duty cycle.

Arrangement T1

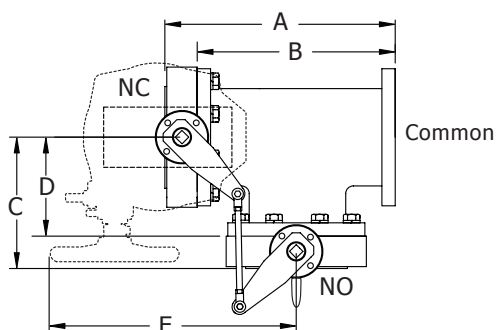
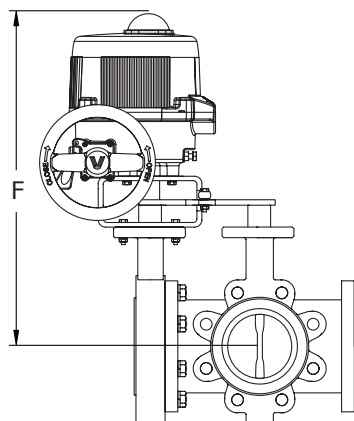


MEN501S-T1 *** (valve size) Electric Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	7.81	17.17	48.0	VB030M
2-1/2"	11.76	10.00	6.76	5.00	8.36	18.55	61.5	VB060M
3"	12.78	11.00	7.28	5.50	8.87	18.78	70.7	VB060M
4"	15.05	13.00	8.55	6.50	14.01	20.55	125.3	VB110M
5"	17.14	15.00	9.64	7.50	15.06	21.06	150.7	VB190M
6"	18.20	16.00	10.20	8.00	15.59	21.57	189.3	VB190M
8"	20.34	18.00	11.34	9.00	17.41	26.21	271.1	VB350M
10"	24.58	22.00	13.58	11.00	19.53	28.99	437.3	EA450
12"	27.03	24.00	15.03	12.00	20.74	30.76	605.5	EA450

Voltage Suffix ***		
Model	Suffix	Voltage
Standard	001	12V AC/DC
	002	24V AC/DC
	003	100-240 VAC
Fail-Safe	012	24V AC/DC
	013	100-240 VAC
Positioner	021	12V AC/DC
	022	24V AC/DC
	023	100-240 VAC
Positioner + Fail Safe	042	24V AC/DC
	043	100-240 VAC

Arrangement T1

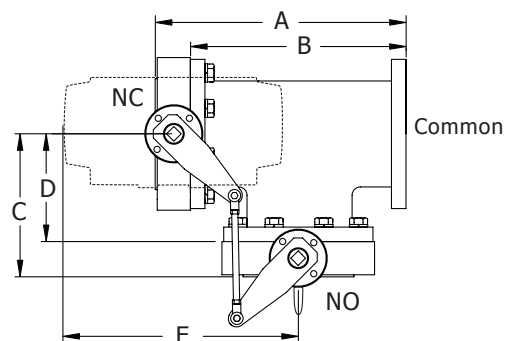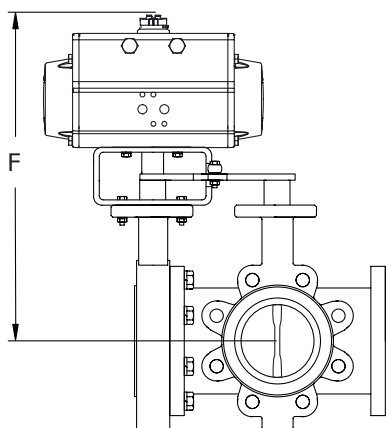

DAN501S-T1 *** (valve size) DA Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	8.55	13.75	44.46	DA63
2-1/2"	11.76	10.00	6.76	5.00	9.10	14.33	55.26	DA63
3"	12.78	11.00	7.28	5.50	10.52	15.27	66.93	DA75
4"	15.05	13.00	8.55	6.50	12.25	16.57	115.2	DA85
5"	17.14	15.00	9.64	7.50	13.98	17.59	144.12	DA100
6"	18.20	16.00	10.20	8.00	15.65	19.46	190.11	DA115
8"	20.34	18.00	11.34	9.00	17.49	23.27	274.01	DA125
10"	24.58	22.00	13.58	11.00	20.85	25.42	429.13	DA140
12"	27.03	24.00	15.03	12.00	23.21	29.40	625.33	DA180

SRN501S-T1 *** (valve size) SR Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	10.06	15.04	51.38	SR85
2-1/2"	11.76	10.00	6.76	5.00	11.29	16.10	67.03	SR100
3"	12.78	11.00	7.28	5.50	12.94	17.69	86.04	SR115
4"	15.05	13.00	8.55	6.50	14.84	18.91	137.64	SR125
5"	17.14	15.00	9.64	7.50	18.41	21.26	197.04	SR160
6"	18.20	16.00	10.20	8.00	18.94	21.77	235.64	SR160
8"	20.34	18.00	11.34	9.00	21.55	27.36	371.45	SR200
10"	24.58	22.00	13.58	11.00	25.87	30.46	549.73	SR230
12"	27.03	24.00	15.03	12.00	26.72	35.14	782.46	SR270

Job Name :

Contractor :

Job Location :

Approval :

Engineer :

Contractor's P.O. :

Approval :

Representative :

Arrangement T2

3-Way Butterfly T Assemblies with Linkage and Actuation
Controlling Flow within a 125# Cast Iron Tee



Features

- Two N501S Series lug style butterfly valves with EPDM liner and stainless steel disc
- 125# cast iron Tee
- Optional butterfly liners, Buna-N (541S) or Viton (531S)
- Custom designed linkage
- Fully assembled and tested
- Six separate arrangement options

Specifications


The MEN501S, DAN501S and SRN501S Series 3-Way Butterfly T assemblies consist of Bonomi N501S Lug pattern rubber lined butterfly valves along with Valbia pneumatic or electric actuators, and linkage assemblies.

Butterfly Valve: The body shall be made from ductile iron, the stem design shall have an ISO pad and square stem, the rubber liner shall be EPDM, and the disc shall be made from CF8M stainless steel. The valve will also be epoxy coated, lug style, ANSI 150 class to 250 Psi, and NSF 61/372 Certified.

Actuators: The pneumatic actuator shall be manufactured by Valbia, with integral side limit stops that do not penetrate the cylinder bore. The spring return models shall incorporate nested style springs for longevity purposes.

The electric actuators shall be manufactured by Valbia, with dual voltages, two extra limit switches, a heater and thermostat, torque limiter, NEMA 4 rating, and a 75% duty cycle.

Arrangement T2

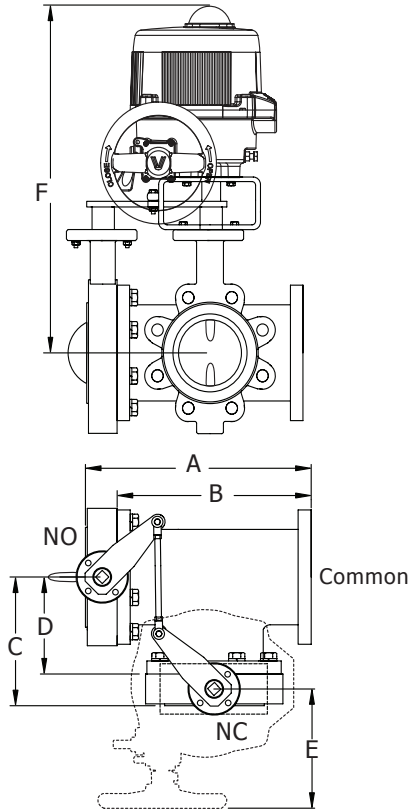

MEN501S-T2 *** (valve size)


Electric Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	3.17	17.17	48.0	VB030M
2-1/2"	11.76	10.00	6.76	5.00	3.46	18.55	61.5	VB060M
3"	12.78	11.00	7.28	5.50	3.46	18.78	70.7	VB060M
4"	15.05	13.00	8.55	6.50	3.38	20.55	125.3	VB110M
5"	17.14	15.00	9.64	7.50	3.28	21.06	150.7	VB190M
6"	18.20	16.00	10.20	8.00	3.28	21.57	189.3	VB190M
8"	20.34	18.00	11.34	9.00	3.27	26.21	271.1	VB350M
10"	24.58	22.00	13.58	11.00	5.40	28.99	437.3	EA450
12"	27.03	24.00	15.03	12.00	5.40	30.76	605.5	EA450

Voltage Suffix ***

Model	Suffix	Voltage
Standard	001	12V AC/DC
	002	24V AC/DC
	003	100-240 VAC
Fail-Safe	012	24V AC/DC
	013	100-240 VAC
	021	12V AC/DC
Positioner	022	24V AC/DC
	023	100-240 VAC
	042	24V AC/DC
Positioner + Fail Safe	043	100-240 VAC

Arrangement T2

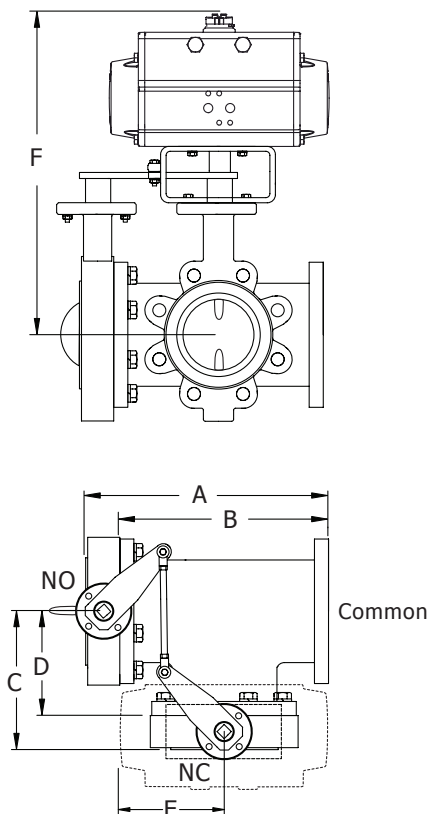

DAN501S-T2 *** (valve size) DA Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	3.22	13.75	44.46	DA63
2-1/2"	11.76	10.00	6.76	5.00	3.22	14.33	55.26	DA63
3"	12.78	11.00	7.28	5.50	4.13	15.27	66.93	DA75
4"	15.05	13.00	8.55	6.50	4.73	16.57	115.2	DA85
5"	17.14	15.00	9.64	7.50	5.41	17.59	144.12	DA100
6"	18.20	16.00	10.20	8.00	6.55	19.46	190.11	DA115
8"	20.34	18.00	11.34	9.00	7.32	23.27	274.01	DA125
10"	24.58	22.00	13.58	11.00	8.56	25.42	429.13	DA140
12"	27.03	24.00	15.03	12.00	9.71	29.40	625.33	DA180

SRN501S-T2 *** (valve size) SR Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	3.22	15.04	51.38	SR85
2-1/2"	11.76	10.00	6.76	5.00	3.22	16.10	67.03	SR100
3"	12.78	11.00	7.28	5.50	4.13	17.69	86.04	SR115
4"	15.05	13.00	8.55	6.50	4.73	18.91	137.64	SR125
5"	17.14	15.00	9.64	7.50	5.41	21.26	197.04	SR160
6"	18.20	16.00	10.20	8.00	6.55	21.77	235.64	SR160
8"	20.34	18.00	11.34	9.00	7.32	27.36	371.45	SR200
10"	24.58	22.00	13.58	11.00	8.56	30.46	549.73	SR230
12"	27.03	24.00	15.03	12.00	9.71	35.14	782.46	SR270

Job Name :

Contractor :

Job Location :

Approval :

Engineer :

Contractor's P.O. :

Approval :

Representative :



Arrangement T3

3-Way Butterfly T Assemblies with Linkage and Actuation
Controlling Flow within a 125# Cast Iron Tee

Features

- Two N501S Series lug style butterfly valves with EPDM liner and stainless steel disc
- 125# cast iron Tee
- Optional butterfly liners, Buna-N (541S) or Viton (531S)
- Custom designed linkage
- Fully assembled and tested
- Six separate arrangement options

Specifications


The MEN501S, DAN501S and SRN501S Series 3-Way Butterfly T assemblies consist of Bonomi N501S Lug pattern rubber lined butterfly valves along with Valbia pneumatic or electric actuators, and linkage assemblies.

Butterfly Valve: The body shall be made from ductile iron, the stem design shall have an ISO pad and square stem, the rubber liner shall be EPDM, and the disc shall be made from CF8M stainless steel. The valve will also be epoxy coated, lug style, ANSI 150 class to 250 Psi, and NSF 61/372 Certified.

Actuators: The pneumatic actuator shall be manufactured by Valbia, with integral side limit stops that do not penetrate the cylinder bore. The spring return models shall incorporate nested style springs for longevity purposes.

The electric actuators shall be manufactured by Valbia, with dual voltages, two extra limit switches, a heater and thermostat, torque limiter, NEMA 4 rating, and a 75% duty cycle.

Arrangement T3

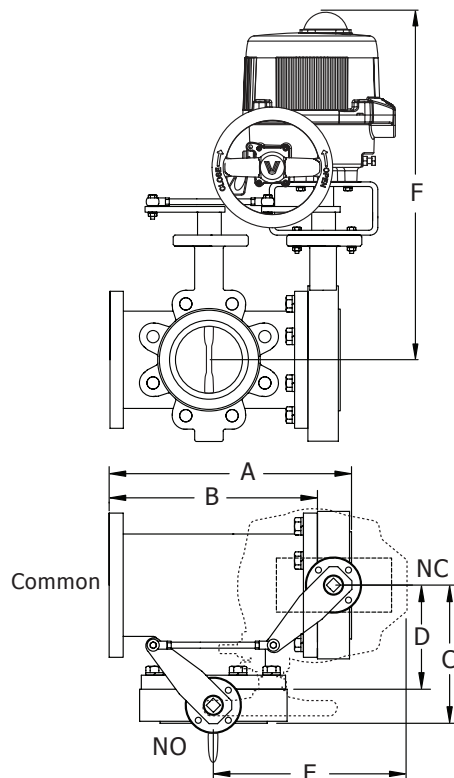

MEN501S-T3 *** (valve size)


Electric Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	10.21	17.17	48.0	VB030M
2-1/2"	11.76	10.00	6.76	5.00	11.15	18.55	61.5	VB060M
3"	12.78	11.00	7.28	5.50	11.66	18.78	70.7	VB060M
4"	15.05	13.00	8.55	6.50	11.49	20.55	125.3	VB110M
5"	17.14	15.00	9.64	7.50	12.54	21.06	150.7	VB190M
6"	18.20	16.00	10.20	8.00	13.07	21.57	189.3	VB190M
8"	20.34	18.00	11.34	9.00	13.91	26.21	271.1	VB350M
10"	24.58	22.00	13.58	11.00	16.99	28.99	437.3	EA450
12"	27.03	24.00	15.03	12.00	18.20	30.76	605.5	EA450

Voltage Suffix ***

Model	Suffix	Voltage
Standard	001	12V AC/DC
	002	24V AC/DC
	003	100-240 VAC
Fail-Safe	012	24V AC/DC
	013	100-240 VAC
	021	12V AC/DC
Positioner	022	24V AC/DC
	023	100-240 VAC
Positioner + Fail Safe	042	24V AC/DC
	043	100-240 VAC

Arrangement T3

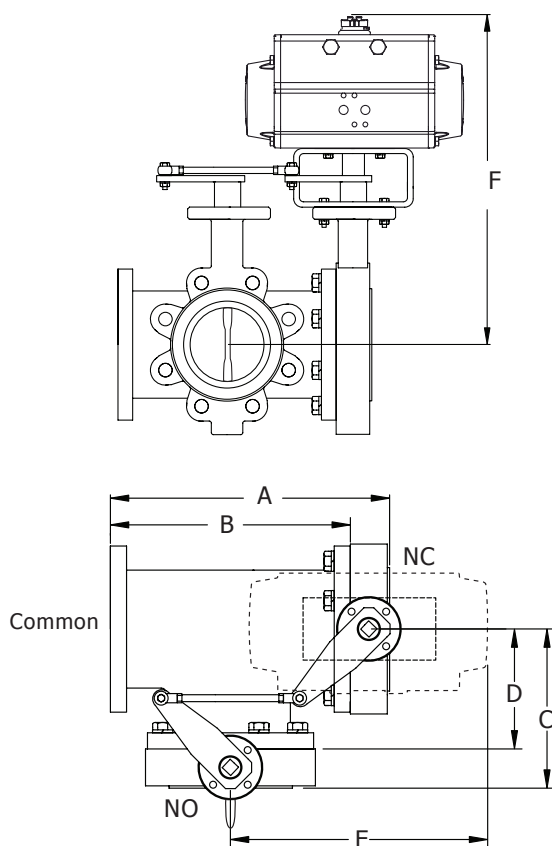

DAN501S-T3 *** (valve size) DA Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	8.55	13.75	44.46	DA63
2-1/2"	11.76	10.00	6.76	5.00	9.10	14.33	55.26	DA63
3"	12.78	11.00	7.28	5.50	10.52	15.27	66.93	DA75
4"	15.05	13.00	8.55	6.50	12.25	16.57	115.2	DA85
5"	17.14	15.00	9.64	7.50	13.98	17.59	144.12	DA100
6"	18.20	16.00	10.20	8.00	15.65	19.46	190.11	DA115
8"	20.34	18.00	11.34	9.00	17.49	23.27	274.01	DA125
10"	24.58	22.00	13.58	11.00	20.85	25.42	429.13	DA140
12"	27.03	24.00	15.03	12.00	23.21	29.40	625.33	DA180

SRN501S-T3 *** (valve size) SR Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	10.06	15.04	51.38	SR85
2-1/2"	11.76	10.00	6.76	5.00	11.29	16.10	67.03	SR100
3"	12.78	11.00	7.28	5.50	12.94	17.69	86.04	SR115
4"	15.05	13.00	8.55	6.50	14.84	18.91	137.64	SR125
5"	17.14	15.00	9.64	7.50	18.41	21.26	197.04	SR160
6"	18.20	16.00	10.20	8.00	18.94	21.77	235.64	SR160
8"	20.34	18.00	11.34	9.00	21.55	27.36	371.45	SR200
10"	24.58	22.00	13.58	11.00	25.87	30.46	549.73	SR230
12"	27.03	24.00	15.03	12.00	26.72	35.14	782.46	SR270

Job Name :

Contractor :

Job Location :

Approval :

Engineer :

Contractor's P.O. :

Approval :

Representative :



Arrangement T4

3-Way Butterfly T Assemblies with Linkage and Actuation
Controlling Flow within a 125# Cast Iron Tee

Features

- Two N501S Series lug style butterfly valves with EPDM liner and stainless steel disc
- 125# cast iron Tee
- Optional butterfly liners, Buna-N (541S) or Viton (531S)
- Custom designed linkage
- Fully assembled and tested
- Six separate arrangement options

Specifications


The MEN501S, DAN501S and SRN501S Series 3-Way Butterfly T assemblies consist of Bonomi N501S Lug pattern rubber lined butterfly valves along with Valbia pneumatic or electric actuators, and linkage assemblies.

Butterfly Valve: The body shall be made from ductile iron, the stem design shall have an ISO pad and square stem, the rubber liner shall be EPDM, and the disc shall be made from CF8M stainless steel. The valve will also be epoxy coated, lug style, ANSI 150 class to 250 Psi, and NSF 61/372 Certified.

Actuators: The pneumatic actuator shall be manufactured by Valbia, with integral side limit stops that do not penetrate the cylinder bore. The spring return models shall incorporate nested style springs for longevity purposes.

The electric actuators shall be manufactured by Valbia, with dual voltages, two extra limit switches, a heater and thermostat, torque limiter, NEMA 4 rating, and a 75% duty cycle.

Arrangement T4

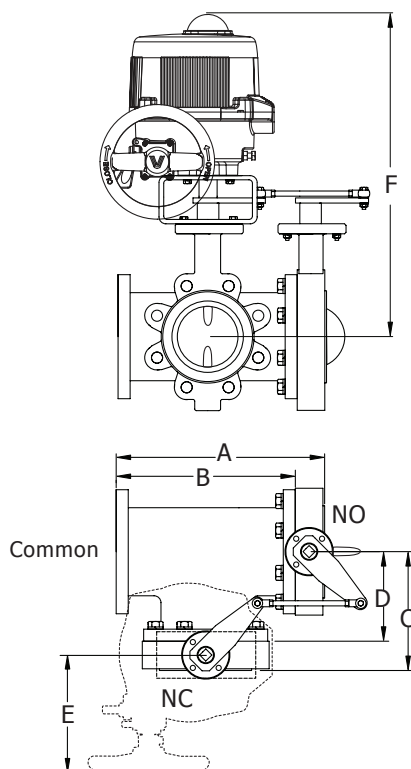

MEN501S-T4 *** (valve size)


Electric Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	10.65	4.50	3.17	17.17	48.0	VB030M
2-1/2"	11.76	10.00	11.76	5.00	3.46	18.55	61.5	VB060M
3"	12.78	11.00	12.78	5.50	3.46	18.78	70.7	VB060M
4"	15.05	13.00	15.05	6.50	3.38	20.55	125.3	VB110M
5"	17.14	15.00	17.14	7.50	3.28	21.06	150.7	VB190M
6"	18.20	16.00	18.20	8.00	3.28	21.57	189.3	VB190M
8"	20.34	18.00	20.34	9.00	3.27	26.21	271.1	VB350M
10"	24.58	22.00	24.58	11.00	5.40	28.99	437.3	EA450
12"	27.03	24.00	27.03	12.00	5.40	30.76	605.5	EA450

Voltage Suffix ***

Model	Suffix	Voltage
Standard	001	12V AC/DC
	002	24V AC/DC
	003	100-240 VAC
Fail-Safe	012	24V AC/DC
	013	100-240 VAC
Positioner	021	12V AC/DC
	022	24V AC/DC
	023	100-240 VAC
Positioner + Fail Safe	042	24V AC/DC
	043	100-240 VAC

Arrangement T4

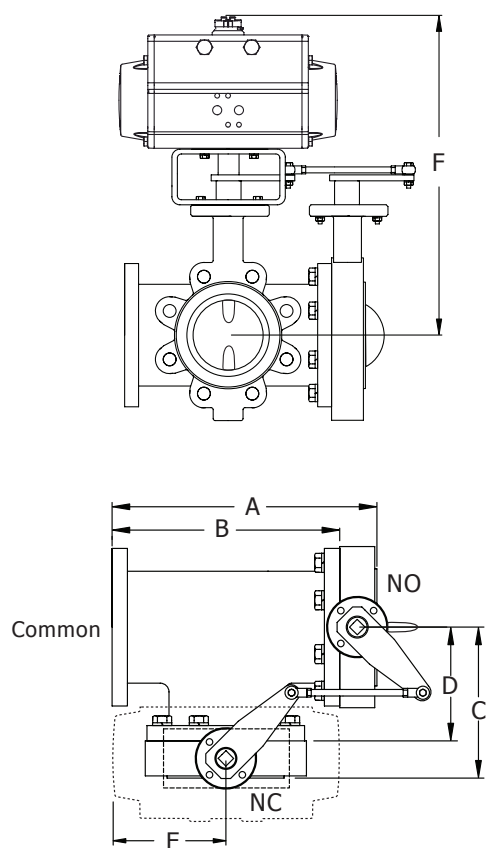

DAN501S-T4 *** (valve size) DA Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	3.22	13.75	44.46	DA63
2-1/2"	11.76	10.00	6.76	5.00	3.22	14.33	55.26	DA63
3"	12.78	11.00	7.28	5.50	4.13	15.27	66.93	DA75
4"	15.05	13.00	8.55	6.50	4.73	16.57	115.2	DA85
5"	17.14	15.00	9.64	7.50	5.41	17.59	144.12	DA100
6"	18.20	16.00	10.20	8.00	6.55	19.46	190.11	DA115
8"	20.34	18.00	11.34	9.00	7.32	23.27	274.01	DA125
10"	24.58	22.00	13.58	11.00	8.56	25.42	429.13	DA140
12"	27.03	24.00	15.03	12.00	9.71	29.40	625.33	DA180

SRN501S-T4 *** (valve size) SR Pneumatic Dimensions

Size	A	B	C	D	E	F	Wt.	Act.
2"	10.65	9.00	6.15	4.50	4.73	15.04	51.38	SR85
2-1/2"	11.76	10.00	6.76	5.00	5.41	16.10	67.03	SR100
3"	12.78	11.00	7.28	5.50	6.55	17.69	86.04	SR115
4"	15.05	13.00	8.55	6.50	7.32	18.91	137.64	SR125
5"	17.14	15.00	9.64	7.50	9.84	21.26	197.04	SR160
6"	18.20	16.00	10.20	8.00	9.84	21.77	235.64	SR160
8"	20.34	18.00	11.34	9.00	11.38	27.36	371.45	SR200
10"	24.58	22.00	13.58	11.00	13.58	30.46	549.73	SR230
12"	27.03	24.00	15.03	12.00	13.22	35.14	782.46	SR270

Job Name :

Contractor :

Job Location :

Approval :

Engineer :

Contractor's P.O. :

Approval :

Representative :



Arrangement T5

3-Way Butterfly T Assemblies with Linkage and Actuation
Controlling Flow within a 125# Cast Iron Tee

Features

- Two N501S Series lug style butterfly valves with EPDM liner and stainless steel disc
- 125# cast iron Tee
- Optional butterfly liners, Buna-N (541S) or Viton (531S)
- Custom designed linkage
- Fully assembled and tested
- Six separate arrangement options

Specifications



The MEN501S, DAN501S and SRN501S Series 3-Way Butterfly T assemblies consist of Bonomi N501S Lug pattern rubber lined butterfly valves along with Valbia pneumatic or electric actuators, and linkage assemblies.

Butterfly Valve: The body shall be made from ductile iron, the stem design shall have an ISO pad and square stem, the rubber liner shall be EPDM, and the disc shall be made from CF8M stainless steel. The valve will also be epoxy coated, lug style, ANSI 150 class to 250 Psi, and NSF 61/372 Certified.

Actuators: The pneumatic actuator shall be manufactured by Valbia, with integral side limit stops that do not penetrate the cylinder bore. The spring return models shall incorporate nested style springs for longevity purposes.

The electric actuators shall be manufactured by Valbia, with dual voltages, two extra limit switches, a heater and thermostat, torque limiter, NEMA 4 rating, and a 75% duty cycle.

Arrangement T5

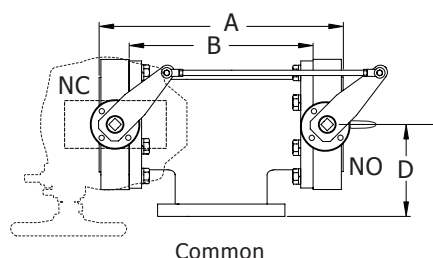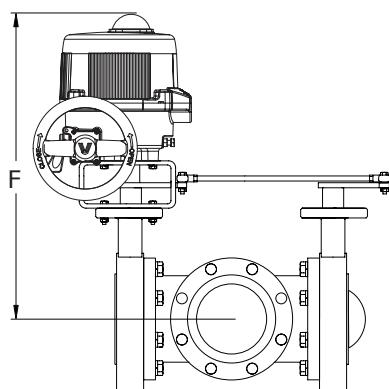

MEN501S-T5 *** (valve size)



Electric Dimensions

Size	A	B	D	F	Wt.	Act.
2"	12.30	9.00	4.50	17.17	48.0	VB030M
2-1/2"	13.52	10.00	5.00	18.55	61.5	VB060M
3"	14.56	11.00	5.50	18.78	70.7	VB060M
4"	17.10	13.00	6.50	20.55	125.3	VB110M
5"	19.28	15.00	7.50	21.06	150.7	VB190M
6"	20.40	16.00	8.00	21.57	189.3	VB190M
8"	22.68	18.00	9.00	26.21	271.1	VB350M
10"	27.16	22.00	11.00	28.99	437.3	ES450
12"	30.06	24.00	12.00	30.76	605.5	ES450

Voltage Suffix ***

Model	Suffix	Voltage
Standard	001	12V AC/DC
	002	24V AC/DC
	003	100-240 VAC
Fail-Safe	012	24V AC/DC
	013	100-240 VAC
Positioner	021	12V AC/DC
	022	24V AC/DC
	023	100-240 VAC
Positioner + Fail Safe	042	24V AC/DC
	043	100-240 VAC

Arrangement T5

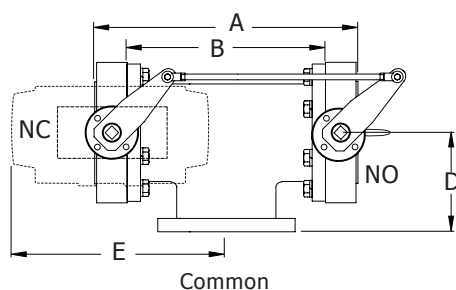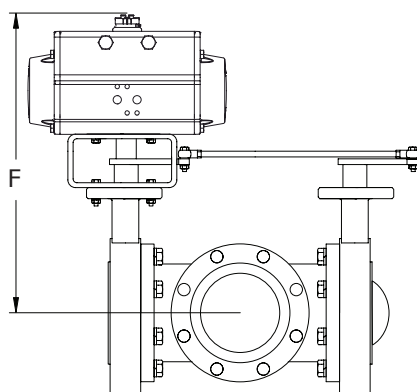

DAN501S-T5 *** (valve size) DA Pneumatic Dimensions

Size	A	B	D	E	F	Wt.	Act.
2"	12.30	9.00	4.50	8.55	13.75	44.46	VB030M
2-1/2"	13.52	10.00	5.00	9.10	14.33	55.26	VB060M
3"	14.56	11.00	5.50	10.52	15.27	66.93	VB060M
4"	17.10	13.00	6.50	12.25	16.57	115.2	VB110M
5"	19.28	15.00	7.50	13.98	17.59	144.12	VB190M
6"	20.40	16.00	8.00	15.65	19.46	190.11	VB190M
8"	22.68	18.00	9.00	17.49	23.27	274.01	VB350M
10"	27.16	22.00	11.00	20.85	25.42	429.13	EA450
12"	30.06	24.00	12.00	23.21	29.40	625.33	EA450

SRN501S-T5 *** (valve size) SR Pneumatic Dimensions

Size	A	B	D	E	F	Wt.	Act.
2"	12.30	9.00	4.50	10.06	15.04	51.38	SR85
2-1/2"	13.52	10.00	5.00	11.29	16.10	67.03	SR100
3"	14.56	11.00	5.50	12.94	17.69	86.04	SR115
4"	17.10	13.00	6.50	14.89	18.91	137.64	SR125
5"	19.28	15.00	7.50	18.41	21.26	197.04	SR160
6"	20.40	16.00	8.00	18.94	21.77	235.64	SR160
8"	22.68	18.00	9.00	21.55	27.36	371.45	SR200
10"	27.16	22.00	11.00	25.87	30.46	549.73	SR230
12"	30.06	24.00	12.00	26.72	35.14	782.46	SR270

Job Name :

Contractor :

Job Location :

Approval :

Engineer :

Contractor's P.O. :

Approval :

Representative :



Arrangement T6

3-Way Butterfly T Assemblies with Linkage and Actuation
Controlling Flow within a 125# Cast Iron Tee

Features

- Two N501S Series lug style butterfly valves with EPDM liner and stainless steel disc
- 125# cast iron Tee
- Optional butterfly liners, Buna-N (541S) or Viton (531S)
- Custom designed linkage
- Fully assembled and tested
- Six separate arrangement options

Specifications


The MEN501S, DAN501S and SRN501S Series 3-Way Butterfly T assemblies consist of Bonomi N501S Lug pattern rubber lined butterfly valves along with Valbia pneumatic or electric actuators, and linkage assemblies.

Butterfly Valve: The body shall be made from ductile iron, the stem design shall have an ISO pad and square stem, the rubber liner shall be EPDM, and the disc shall be made from CF8M stainless steel. The valve will also be epoxy coated, lug style, ANSI 150 class to 250 Psi, and NSF 61/372 Certified.

Actuators: The pneumatic actuator shall be manufactured by Valbia, with integral side limit stops that do not penetrate the cylinder bore. The spring return models shall incorporate nested style springs for longevity purposes.

The electric actuators shall be manufactured by Valbia, with dual voltages, two extra limit switches, a heater and thermostat, torque limiter, NEMA 4 rating, and a 75% duty cycle.

Arrangement T6

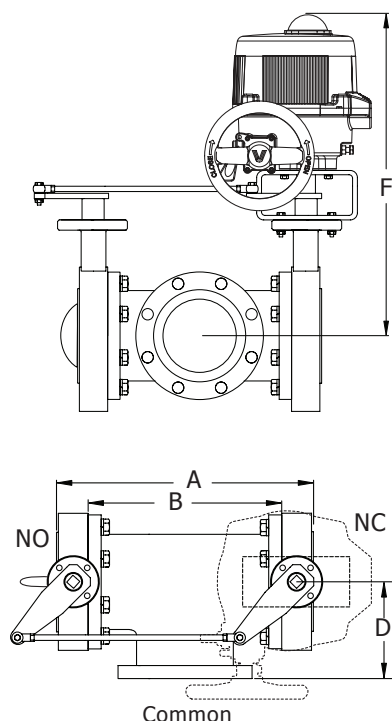

MEN501S-T6 *** (valve size)


Electric Dimensions

Size	A	B	D	F	Wt.	Act.
2"	12.30	9.00	4.50	17.17	48.0	VB030M
2-1/2"	13.52	10.00	5.00	18.55	61.5	VB060M
3"	14.56	11.00	5.50	18.78	70.7	VB060M
4"	17.10	13.00	6.50	20.55	125.3	VB110M
5"	19.28	15.00	7.50	21.06	150.7	VB190M
6"	20.40	16.00	8.00	21.57	189.3	VB190M
8"	22.68	18.00	9.00	26.21	271.1	VB350M
10"	27.16	22.00	11.00	28.99	437.3	EA450
12"	30.06	24.00	12.00	30.76	605.5	EA450

Voltage Suffix ***

Model	Suffix	Voltage
Standard	001	12V AC/DC
	002	24V AC/DC
	003	100-240 VAC
Fail-Safe	012	24V AC/DC
	013	100-240 VAC
	021	12V AC/DC
Positioner	022	24V AC/DC
	023	100-240 VAC
Positioner + Fail Safe	042	24V AC/DC
	043	100-240 VAC

Arrangement T6

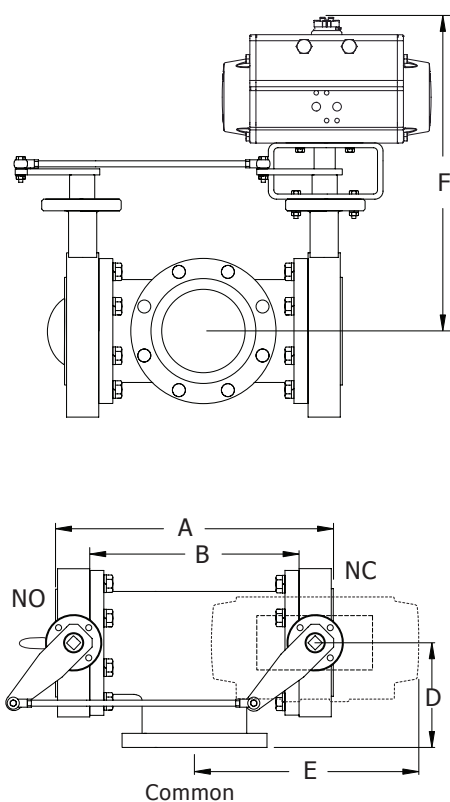

DAN501S-T6 *** (valve size) DA Pneumatic Dimensions

Size	A	B	D	E	F	Wt.	Act.
2"	12.30	9.00	4.50	8.55	13.75	44.46	DA63
2-1/2"	13.52	10.00	5.00	9.10	14.33	55.26	DA63
3"	14.56	11.00	5.50	10.52	15.27	66.93	DA75
4"	17.10	13.00	6.50	12.25	16.57	115.2	DA85
5"	19.28	15.00	7.50	13.98	17.59	144.12	DA100
6"	20.40	16.00	8.00	15.65	19.46	190.11	DA115
8"	22.68	18.00	9.00	17.49	23.27	274.01	DA125
10"	27.16	22.00	11.00	20.85	25.42	429.13	DA140
12"	30.06	24.00	12.00	23.21	29.40	625.33	DA180

SRN501S-T6 *** (valve size) SR Pneumatic Dimensions

Size	A	B	D	E	F	Wt.	Act.
2"	12.30	9.00	4.50	10.06	15.04	51.38	DA63
2-1/2"	13.52	10.00	5.00	11.29	16.10	67.03	DA63
3"	14.56	11.00	5.50	12.94	17.69	86.04	DA75
4"	17.10	13.00	6.50	14.89	18.91	137.64	DA85
5"	19.28	15.00	7.50	18.41	21.26	197.04	DA100
6"	20.40	16.00	8.00	18.94	21.77	235.64	DA115
8"	22.68	18.00	9.00	21.55	27.36	371.45	DA125
10"	27.16	22.00	11.00	25.87	30.46	549.73	DA140
12"	30.06	24.00	12.00	26.72	35.14	782.46	DA180

Job Name :

Contractor :

Job Location :

Approval :

Engineer :

Contractor's P.O. :


Approval :

Representative :


THREE-WAY TEE CONFIGURATION

Arrangement	Actuated Valve	Normally Closed	Normally Open
T1	Valve A	Valve A	Valve B
T2	Valve B	Valve B	Valve A
T3	Valve C	Valve C	Valve B
T4	Valve B	Valve B	Valve C
T5	Valve A	Valve A	Valve C
T6	Valve C	Valve C	Valve A


Arrangement No.T1

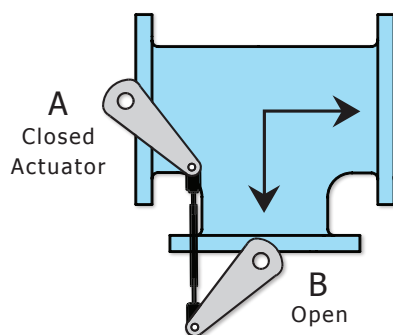


Arrangement No.T3

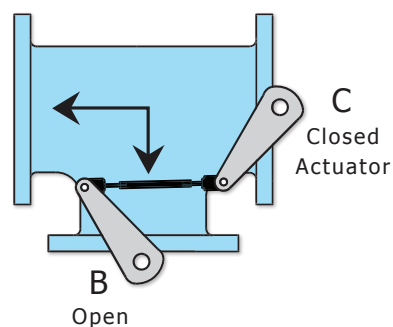


Arrangement No.T5

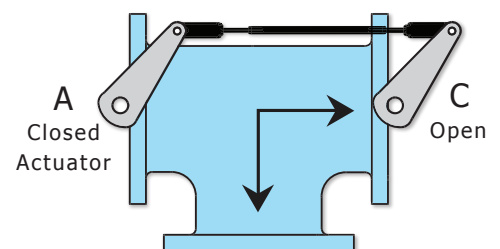

Arrangement No.T2

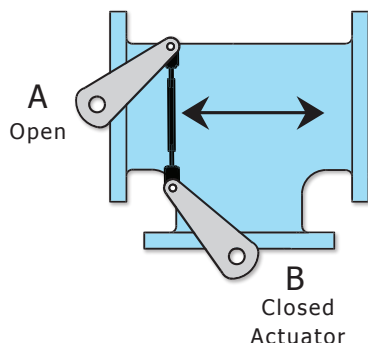

Arrangement No.T4

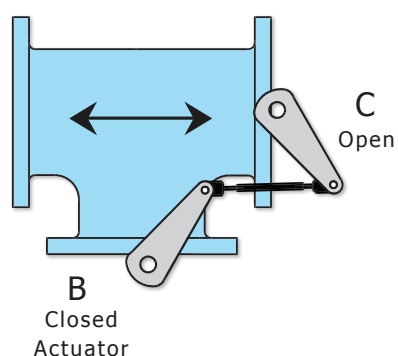

Arrangement No.T6

