


NEW

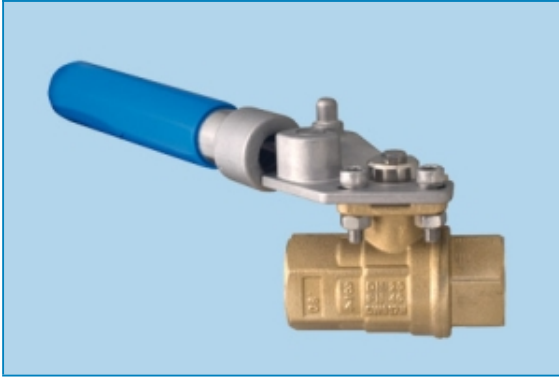

Serie DEADMAN SPRING RETURN

Articolo 250N SRL

- Lever brass 2-Way 2-piece, full port ball valve, 1/4" to 2".
- Temperature up to 366°F.
 - Pressure rating 600 WOG - 150 WSP.
 - Blow out proof stem. - P.T.F.E seats and double O-ring stem packing.
 - P.T.F.E seats with O-ring backing for low operating torque.
 - Adjustable spring return lever.

	PART NAME	MATERIAL
1	HANDLE HEAD	CF8
2	ANCHOR	CF8M
3	ANCHOR SCREW	STAINLESS STEEL 316
4	SPRING ROD	STAINLESS STEEL 316
5	SPRING	STAINLESS STEEL 301
6	HANDLE EXTENSION	STAINLESS STEEL 304
7	SLEEVE	PVC
8	WASHER	STAINLESS STEEL 304
9	HEX NUT	STAINLESS STEEL 304
10	SOCKET HEAD SCREW	STAINLESS STEEL 304

Valve materials and size: see table page 15 art. 250N

SIZE	L	J	D(ISO5211)	TORQUE
1/4"	170	9	F03/F04	15 Nm
3/8"	170	9	F03/F04	15 Nm
1/2"	170	9	F03/F04	15 Nm
3/4"	170	9	F03/F04	15 Nm
1"	220	11	F04	22 Nm
1"1/4	220	11	F04	22 Nm
1"1/2	280	14	F05	35 Nm
2"	280	14	F05	35 Nm