


Brass Ball Valve

2 Piece, Full Port, Threaded Connection with Steam Trim, Stainless Steel Trim, 600 WOG, 250 WSP

T-100SSS



CRN# OC16887.5469870YTN

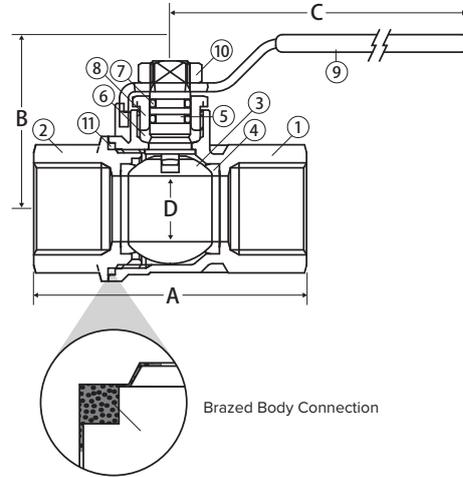

FEATURES


- Triple Sealing Stem with 2 FKM O-Rings and Graphite Seal
- 250 WSP Rating
- Patent Pending Design
- Special High Temperature Resistant Handle
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available

CERTIFICATIONS/APPROVALS

MSS SP-110
ANSI B1.20.1

VALVE SEAT RATING

1/2" - 3/4" 600 WOG, 1" - 2" 500 WOG - 250 WSP

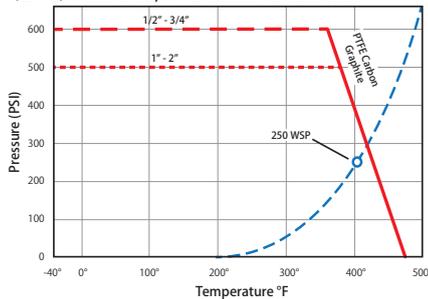

MATERIALS

No.	Part	Material
1	Body	Brass - C37700
2	End Connection	Brass - C37700
3	Ball	316 Stainless Steel
4	Seat (2)	PTFE Carbon Graphite
5	Stem	316 Stainless Steel
6	Packing	PTFE Carbon Graphite
7	Stem O-ring (2)	FKM
8	Packing Gland	Brass - C38500
9	Handle	Steel - Red Coated
10	Handle Nut	316 Stainless Steel
11	Brazing Ring	BrazeTec Soldamoll

DIMENSIONS

Part No	Size	A	B	C	D	C _v
100-533	1/2"	2.45	1.53	2.95	0.59	16.82
100-534	3/4"	2.71	1.95	3.74	0.79	34.80
100-535	1"	3.30	2.40	4.75	0.97	52.20
100-536	1-1/4"	3.80	2.59	4.75	1.23	112.52
100-537	1-1/2"	4.16	3.22	6.00	1.49	174.00
100-538	2"	5.00	3.40	6.00	1.99	255.20



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.